


07 P/F




With Cap



Packaging	C1
Loose / Box	10.5
Taped / Reel	26.0

(Pin Type Coils)

Pluggable Inductors

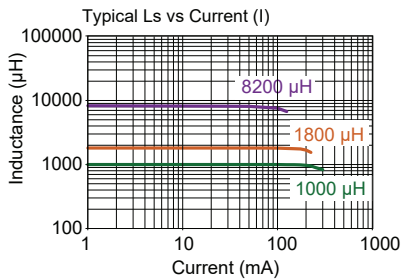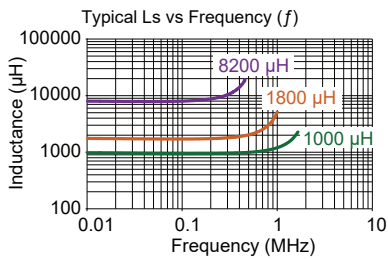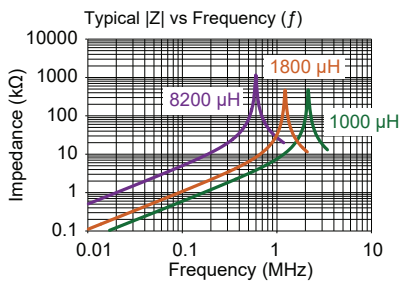

Part No	Inductance	f _L	Tol	Q	f _q	SRF	DCR	Rated DC Current
	L (μH)	(MHz)	± (%)	min	(MHz)	min (MHz)	max (Ω)	
07P/F-681K-YY	680	0.02	10	80	0.796	2.00	3.10	250
07P/F-102X-YY	1000	0.02	5,10	115	0.796	1.80	3.55	220
07P/F-152X-YY	1500	0.02	5,10	115	0.252	1.05	5.20	155
07P/F-182X-YY	1800	0.02	5,10	115	0.252	1.05	5.70	150
07P/F-222X-YY	2200	0.02	5,10	115	0.252	1.00	6.50	150
07P/F-392X-YY	3900	0.02	5,10	100	0.252	0.70	12.00	100
07P/F-472X-YY	4700	0.02	5,10	100	0.252	0.65	13.50	100
07P/F-562X-YY	5600	0.02	5,10	100	0.252	0.60	15.00	80
07P/F-822X-YY	8200	0.02	5,10	100	0.252	0.45	27.35	80

Core Material: Ferrite

Revision date: 29 Jul 2022

SPQ:	Packaging Form	Loose / Box	Taped / Reel
	Radial	500 [-50]	700 [-51]

Remarks: Also available with shorter leads.